

Altusen KL1516 17 Zoll oder 19 Zoll LCD TFT Einbaukonsole Dual Rail inkl. 16 Port KVM Switch



KL1516 16-Port Cat 5 High-Density Dual Rail LCD KVM Switch

ALTUSEN KL1516 LCD KVM Switch features independently retractable, dual slide 17" or 19" LCD monitor and keyboard with built-in touchpad. A single KL1516 can control up to 16 computers. For increased reliability and efficiency, RJ-45 connectors and Cat 5e cable are used to link to the computers. Utilizing KVM Adapter Cables for the final linkup, the KL1516 permits any combination of PCs, Macs, Sun computers, and serial devices to coexist on the installation.

Features

KVM console with 17" or 19" LCD monitor in a sliding housing with top and bottom clearance for smooth operation in a 1U high rack

Dual Rail operation - LCD monitor slides independently of the keyboard/touchpad

LCD module rotates up to 120 degrees for a more comfortable viewing angle

Console lock enables the sliding console to remain securely locked away when not in use

A single console controls up to 16 computers - daisy chain up to 31 additional units to control up to 512 computers

KVM adapter cables with automatic conversion allow flexible interface combinations. PCs, Macs, Sun computers, and serial devices can all coexist on the installation.

RJ-45 connectors and Cat 5e cable - extends the distance between computers and switch - up to 40m (130') for resolutions of 1280 x 1024 @75Hz

A dedicated console port for management from an external console - plus an extra PS/2 mouse port for external mouse use with the integrated LCD console

No software required - convenient computer selection via port selection switches, Hotkeys and intuitive On Screen Display (OSD) menus

OSD screen automatically adjusts to resolution changes - OSD tree structure makes finding and managing computers easy

Quickly and conveniently switch to any computer with station and port selection switches- LED displays indicate the station and port location

Video settings of attached computers are automatically adjusted for optimal output to the LCD monitor
Auto Scan feature for monitoring user-selected computers

Two level password security - only authorized users view and control the computers - up to four users plus an administrator with separate profiles for each

Broadcast support - commands from the keyboard can be broadcast to all available computers on the installation

Standard 105-key keyboard; Mac and Sun keyboard emulation

Dedicated keys to invoke Hotkey Mode and the OSD from the keyboard for quick access to these functions

Rack mountable in 19" System Rack (1U) - standard rack mount kit included - optional Easy Rack Mount (single person installation) kit available (requires separate purchase)

Zero Dead Pixel Guarantee is applicable for the KL1516 17" LCD KVM

Multiplatform support: Windows 2000/XP/Vista, Mac, Linux, Unix, Sun, FreeBSD


For more information about KVMs which can connect to KL1516

Rack Mount Kit Depth (cm)
2X-010G (Long/Optional) 68 - 105
Short (Standard) 42 - 77
Easy Installation
Rack Mount Kit Depth (cm)
2X-012G (Long/Optional) 17" LCD: 68 - 105
19" LCD: 74 - 105
2X-011G (Short/Optional) 17" LCD: 57 - 70
19" LCD: 63 - 70

More information about "Easy Rack Mounting"...

Package Content

- 1x 16-Port Cat 5 High-Density Dual Rail LCD KVM Switch with Standard Rack Mount Kit
- 1x Firmware Upgrade Cable
- 1x Power Cord
- 1x User Manual
- 1x Quick Start Guide

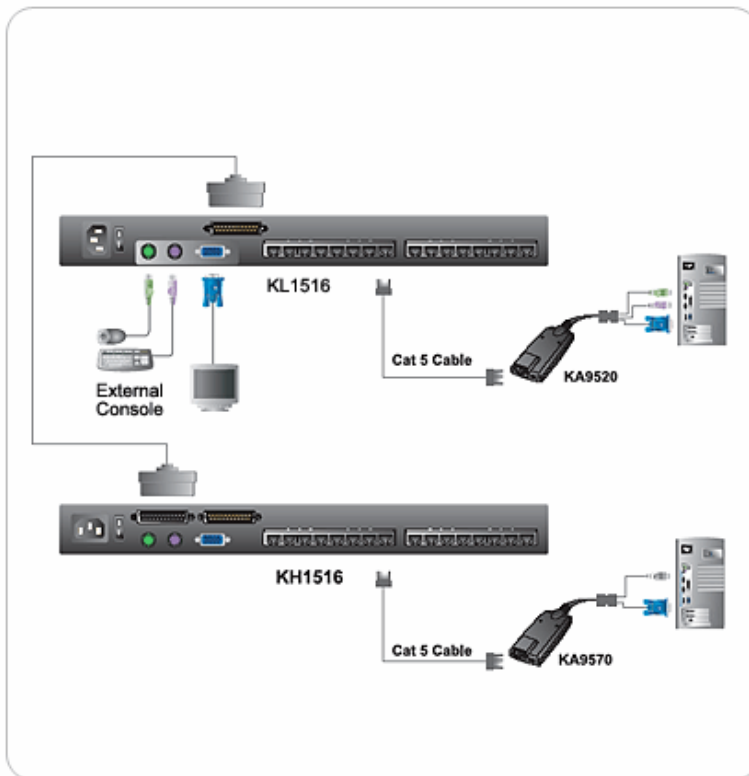

www.bellequip.at/aten/aten/aten.htm



www.bellequip.at/altusen/altusen/altusen.htm

Kontakt Daten - Anfrage:

Tel: 02822 33 33 990

E-Mail: info@bellequip.at

Internet: www.bellequip.at

Lösungen für

IT, EDV, Rechenzentren, Industrie, Automation, Telekommunikation, Leitstand, Rundfunk, Fernsehen, Werbung		Physikalischer Schutz – Datenschutz IT- Sicherheitsräume
19 Zoll Einbaukonsolen 2 Port KVM Switches 4 Port KVM Switches 8 Port KVM Switches 16 Port KVM Switches KVM over IP Switches Matrix KVM over IP Switches KVM Switches DVI KVM Switches DVI Matrix Switches KVM Extender KVM over IP Extender USB Extender VGA Extender VGA + Audio Extender VGA + Audio + RS232 Extender DVI Extender DVI KVM Extender HDMI Extender DVI Splitter VGA Splitter VGA Video Switches Digital Signage Audio over IP Desktop over IP Line Interaktive USV Anlagen	1p / 1p Online USV Anlagen 3p / 1p Online USV Anlagen 3p / 3p Online USV Anlagen USV Anlagen USV Batterien USV Elektro Verteilung USV Service & Support USV Software USV Anlagen für Rechenzentren ATS Automatic Transfer Switches Konverter CATx Patchkabel LWL Patchkabel Netzwerkschränke Serverschränke Remote I/O Kontakte über IP Remote Power Management Rack Monitoring / Serverraum Überwachung Wireless Communication Mobiles Ethernet / Netzwerk GSM / GPRS / EDGE / UMTS / HSDPA Device Server Secure Console Server Serielle Server USB over IP	Brandfrüherkennung Brandmelder Brandschutzpaneele Brandschutztüren Brandmeldezentralen Doppelboden / Doppelböden E-Installationstechnik Gaslöschanlagen Hochverfügbarkeitsraum / Hochverfügbarkeitsräume Kabeldurchführungen Klimageräte Leckagenwarnsysteme Netzersatzanlagen Präzisionsklimaschränke Sauerstoffreduzierung Serversafes Sicherheitsfolien Switchbox Videoüberwachung Zutrittssysteme