

# Altusen KL9116 16 Port LCD KVM over the NET Switch



## 16-Port Dual Rail LCD KVM Switch

The KL9116 is an IP-based KVM control unit that allows both local and remote operators to monitor and access multiple computers from multiple consoles. A single KL9116 can control up to 16 computers and can be accessed from any computer on the Net. The KL9116 features independently retractable 17" LCD monitor and keyboard with built-in touchpad. To maximize space in your data center the keyboard "hides away" when not in use, while the thin profile LCD monitor provides continuous monitoring of computers.

## Features

- Integrated KVM console with 17" LCD monitor in a Dual Rail housing
- Space saving technology with dual bus function support - 1 remote console (one bus) and two local consoles (one bus) control up to 16 computers
- Dual-bus - one local and one remote user can simultaneously control separate ports
- Remotely access computers via the LAN, WAN, or Internet - control your installation when and where you want
- Dual Rail housing is slightly less than 1U with top and bottom clearance for smooth operation in 1U of rack space
- Extra console port - manage computers in the LCD KVM switch from an external console (monitor, PS/2 keyboard, and PS/2 mouse)
- Supports external PS/2 mouse
- Dual Rail - LCD monitor slides independently of the keyboard/touchpad
- LCD module rotates up to 120 degrees for a more comfortable viewing angle
- Console lock - enables the console drawer to remain securely locked away in position when not in use
- Supports dedicated OSD and OSD Toolbar invocation keys
- Internet browser access, Windows Client and Java Client provided, Java Client works with all operating systems
- Graphical OSD and graphical toolbars for convenient, user-friendly operation
- Up to 64 user accounts - up to 32 concurrent remote logins
- Panel Array Mode - view all 16 ports at the same time.
- Message board feature allows logged in users to communicate with each other and allows a remote user to take exclusive control of the KVM functions
- Windows-based Log Server
- Remote power control for attached Power Over the NET™ devices
- Three level login security: Administrator, User, and Select
- Advanced security features include password protection and advanced encryption technologies - 1024 bit RSA, 256 bit AES, 56 bit DES, and 128 bit SSL
- RADIUS server support
- Ports can be set to Exclusive, Occupy and Share
- Network Interfaces: TCP/IP, HTTP, HTTPS, UDP, RADIUS, DHCP, SSL, ARP, DNS, 10Base-T/100Base-TX, auto sense, Ping
- Flash firmware upgradable over network connection
- Super A-Grade TFT LCD Panel; Zero Dead Pixel Guarantee
- Multiplatform support: Windows 2000/XP/Vista, Linux, Unix and FreeBSD.


For more information about KVMs which can connect to KL9116, see Compatible KVM Table

Rack Mounting KitDepth  
2X-010G (Long/Optional)68cm - 105cm  
Short (Standard)42cm - 77cm  
Easy Installation  
Rack Mounting KitDepth  
2X-012G (Long/Optional)68cm - 105cm  
2X-011G (Short/Optional)57cm - 70cm

More information about "Easy Rack Mounting"...

Package Content

1x 16-Port Dual Rail LCD KVM Switch with Standard Rack Mount Kit  
2x Custom KVM Cable Sets  
1x Power Cord  
1x User Manual  
1x Quick Start Guide

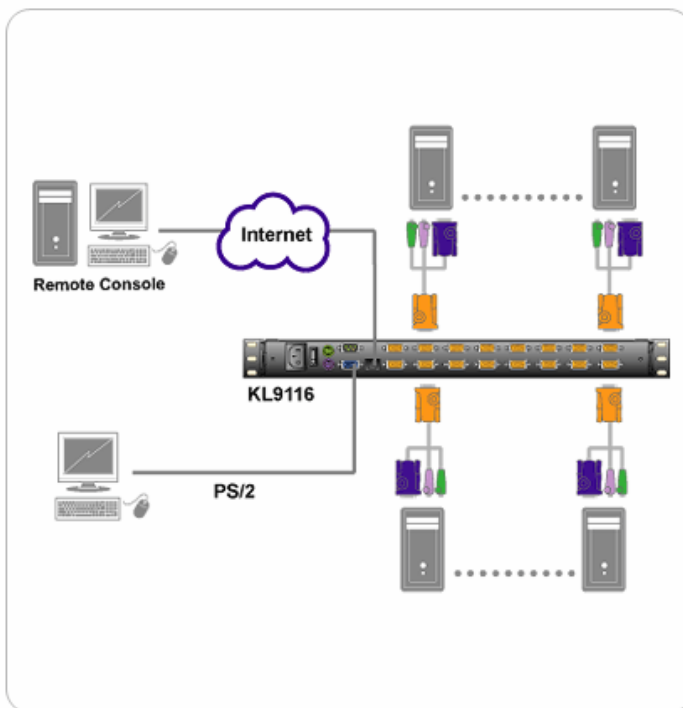

[www.bellequip.at/aten/aten/aten.htm](http://www.bellequip.at/aten/aten/aten.htm)



[www.bellequip.at/altusen/altusen/altusen.htm](http://www.bellequip.at/altusen/altusen/altusen.htm)

## Kontakt Daten - Anfrage:

Tel: 02822 33 33 990

E-Mail: [info@bellequip.at](mailto:info@bellequip.at)

Internet: [www.bellequip.at](http://www.bellequip.at)

## Lösungen für

<b>IT, EDV, Rechenzentren, Industrie, Automation, Telekommunikation, Leitstand, Rundfunk, Fernsehen, Werbung</b>		<b>Physikalischer Schutz – Datenschutz IT- Sicherheitsräume</b>
19 Zoll Einbaukonsolen 2 Port KVM Switches 4 Port KVM Switches 8 Port KVM Switches 16 Port KVM Switches KVM over IP Switches Matrix KVM over IP Switches KVM Switches DVI KVM Switches DVI Matrix Switches KVM Extender KVM over IP Extender USB Extender VGA Extender VGA + Audio Extender VGA + Audio + RS232 Extender DVI Extender DVI KVM Extender HDMI Extender DVI Splitter VGA Splitter VGA Video Switches Digital Signage Audio over IP Desktop over IP Line Interaktive USV Anlagen	1p / 1p Online USV Anlagen 3p / 1p Online USV Anlagen 3p / 3p Online USV Anlagen USV Anlagen USV Batterien USV Elektro Verteilung USV Service & Support USV Software USV Anlagen für Rechenzentren ATS Automatic Transfer Switches Konverter CATx Patchkabel LWL Patchkabel Netzwerkschränke Serverschränke Remote I/O Kontakte über IP Remote Power Management Rack Monitoring / Serverraum Überwachung Wireless Communication Mobiles Ethernet / Netzwerk GSM / GPRS / EDGE / UMTS / HSDPA Device Server Secure Console Server Serielle Server USB over IP	Brandfrüherkennung Brandmelder Brandschutzpaneele Brandschutztüren Brandmeldezentralen Doppelboden / Doppelböden E-Installationstechnik Gaslöschanlagen Hochverfügbarkeitsraum / Hochverfügbarkeitsräume Kabeldurchführungen Klimageräte Leckagenwarnsysteme Netzersatzanlagen Präzisionsklimaschränke Sauerstoffreduzierung Serversafes Sicherheitsfolien Switchbox Videoüberwachung Zutrittssysteme